

PWR -405

GPRS-DLMS

Overview


PWR-405 is a Ultra-low power GPRS RTU, which allows almost any RS232 DLMS devices to transmit data through GPRS / GSM network. This serial server can realize two-way data transparent transmission between COM and GPRS / GSM network by using a SIM card



Main Features

- ◆Support public and APN network access
- ◆Always Online mode, can keep connection with server
- ◆Aluminum alloy case, shielding external disturbance effectively
- ◆Support almost any RS 232 and DLMS device

Dimensions

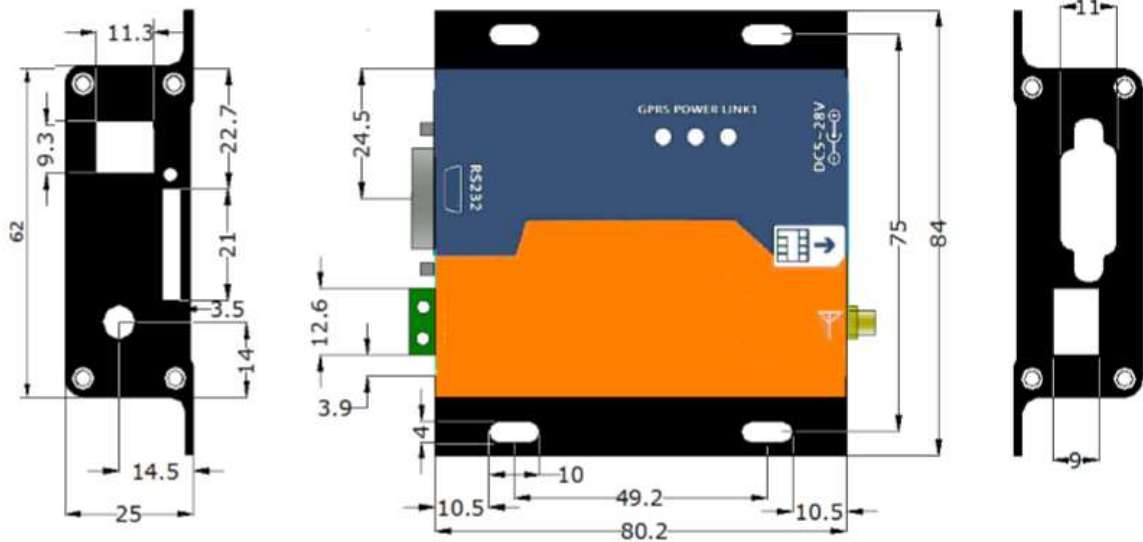

■ ■ ■ Specifications

| | |
|------------------------|-----------------------------|
| Network | |
| Standard | GSM/GPRS |
| Standard Frequency | 850/ 900/ 1800/ 1900 MHz |
| Basic Parameter | |
| Size | 90.8 *84 * 25 mm (L*W*H) |
| Operating Temperature | -10 to +55 degree celsius |
| Input Voltage | 12 to 24 V |
| Working current | Average 22 – 80 m amp/ 12 V |
| Serial | |
| Port number | 1 |
| Interface | RS 232 |
| Data Bits | 5,6,7,8 |
| Stop Bit | 1,2 |
| Check Bit | None, Odd, Even |
| Baud rate | 2400 bps – 115200 bps |
| Flow Control | Bull |
| Others | |
| Warranty | 1 year |

NOTE: PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE, TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE



Logics PowerAMR Pvt. Ltd.
Powering Profit

poweramr.in

Contact +91- 9811007263, 8076963066